




MakeUp Aria
MA.A.4S.0.1B

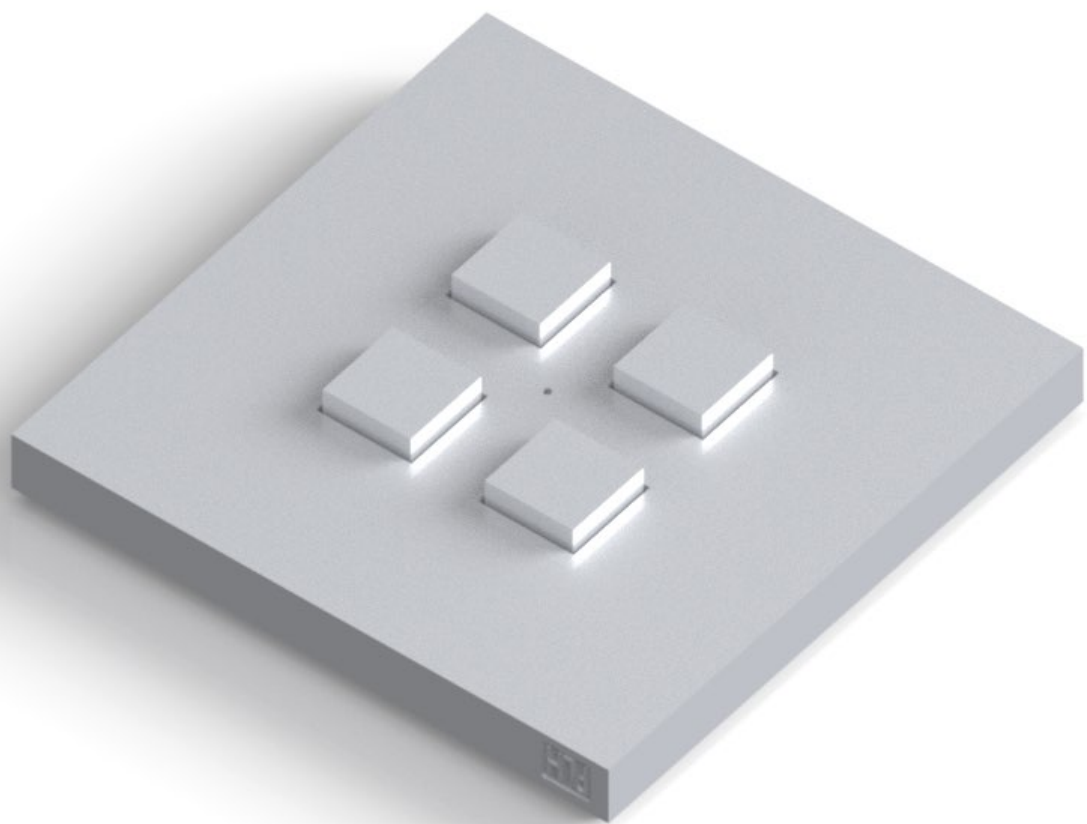


PLH Makeup Aria

cod. MA.A.4S.0.1B

Bluetooth controllable, keypad for operation control with feedback led. The buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lamps together if so desired if used with PLH Aria dimmers or any lighting fixture powered by Casambi or a PLH Aria Jellyfish output interface.

To be configured with Casambi app available for iOS (iPhone 4S or later, iPad 3 or later, iPod Touch 5th gen or later) and Android devices (Android 4.4 KitKat or later devices produced after 2013 with full Bluetooth 4.0 support).

Drawings and measures

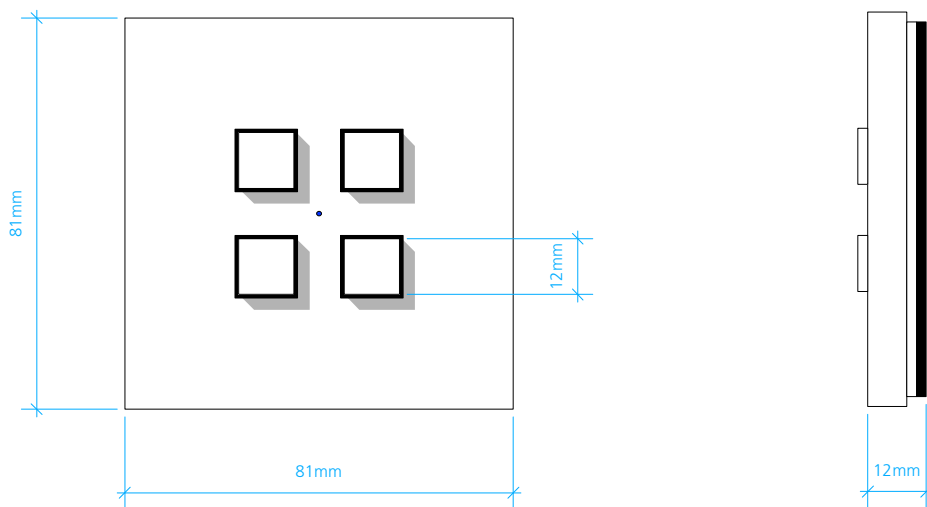

Technical specifications

Input		Firmware:	
Programmable push buttons:	4	3663	4 push buttons
Other inputs:	-	5233	8 push buttons (on request)
Radio transceiver			
Maximum output power:	2,4...2,483 Ghz +4 dBm		
Ambient temperature, ta:	-20...+45 °C		
Max. case temperature, tc:	+65 °C		
Max. relative humidity:	0...80%, non-cond.		
Range (depending on the surroundings)	up to 15 m		
Battery (included)			
Type:	3V CR2032 lithium coin cell		
Lifetime:	10.000 click		
Mechanical data			
Case:	Unibody aluminium or brass		
Dimensions:	81,0 x 81,0 x 12 mm		
Weight:	100 g		
Degree of protection:	IP20 (indoor use only)		