


PLH

Neo Aria Q
NA.Q.4

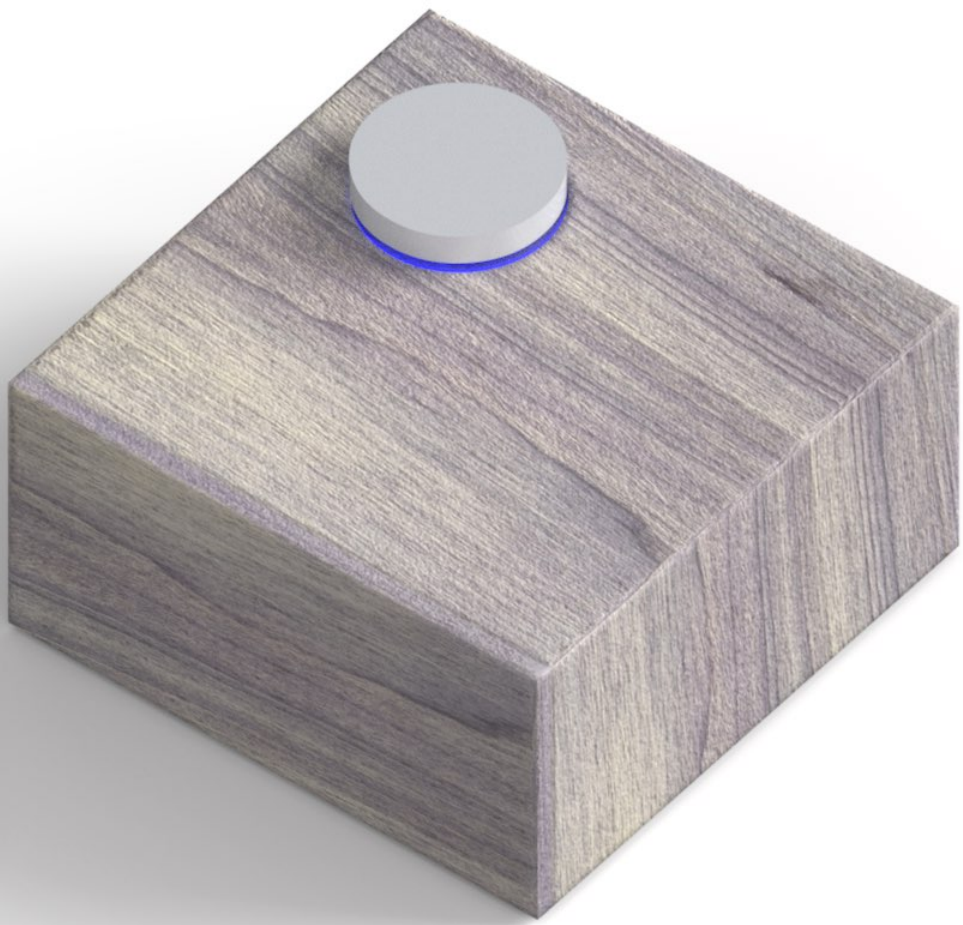


PLH Neo Q

cod. NA.Q.4

Bluetooth controllable, keypad for operation control with feedback led. The buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lamps together if so desired if used with PLH Aria dimmers or any lighting fixture powered by Casambi or a PLH Aria Jellyfish output interface.

To be configured with Casambi app available for iOS (iPhone 4S or later, iPad 3 or later, iPod Touch 5th gen or later) and Android devices (Android 4.4 KitKat or later devices produced after 2013 with full Bluetooth 4.0 support).

Drawings and measures

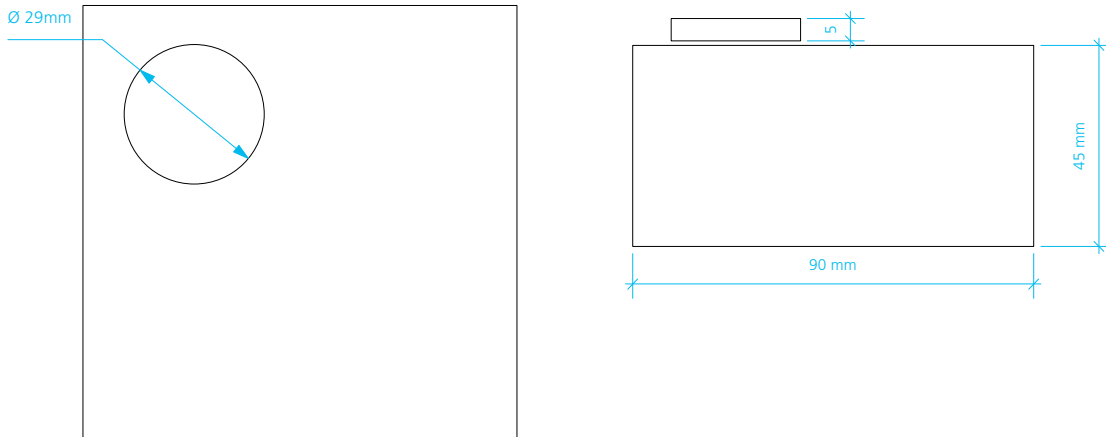

Technical specifications

Input

Programmable push buttons:	3
Other inputs:	Shake

Firmware:

3663	Neo Encoder 2
3660	Neo Encoder 4

Radio transceiver

Maximum output power:	2,4...2,483 Ghz +4 dBm
Ambient temperature, ta:	-20...+45 °C
Max. case temperature, tc:	+65 °C
Max. relative humidity:	0...80%, non-cond.
Range (depending on the surroundings)	up to 15 m

Battery (included)

Type:	3V CR2032 lithium coin cell
Lifetime:	10.000 click

Mechanical data

Case:	Unibody wood, polycarbonate, rubber
Dimensions:	90,0 x 90,0 x45 mm
Weight:	250 g (wwod)
Degree of protection:	IP20 (indoor use only)